

GWMT1 Wall Mounted Thermostat Kit

For Use With Vanguard Remote-Ready Log Sets or Fireplace Systems

READ AND FOLLOW INSTALLATION INSTRUCTIONS !

**INSTALLATION SHOULD BE DONE BY A QUALIFIED INSTALLER
FAMILIAR WITH LOW-VOLTAGE WIRING PROCEDURES.**

**⚠ WARNING: Do not connect this thermostat or log set to any electrical source!
Electrical shock and/or fire hazard will occur.**

Contents Of Kit

- Thermostat Assembly
- 25 Ft. Wire
- Mounting Screws (2)

Installation and connection:

1. Connect one terminal of 25 ft. wire to bottom contact of switch located on heater front control panel (see Figure 1).
2. Connect remaining wire terminal to the "TH" terminal on the control valve (see Figure 1).
3. Route the 25 ft. wire to a convenient location. **IMPORTANT:** The wire may be shortened but must not be lengthened.

The thermostat should be mounted 54" above the floor in a location where there is good air circulation. Avoid heat sources such as lamps, direct sunlight, fireplace, or heat and air conditioning ducts.

4. Gently remove the cover of the thermostat from the base. Grasp the sides of the cover and separate from the base.
5. Feed the electrical wires through the base through the holes on each side of the lower mounting screw.
6. Connect one bare wire end to each terminal ("W" and "R") of the thermostat base.

⚠ WARNING: Do not connect the thermostat to a power source. Electrical shock and/or fire hazard will occur.

7. Install the base onto the wall with the provided screws.
8. Move the temperature adjustment back and forth to insure the bi-metal is free from restrictions.
9. Replace the cover onto the base. (Upon installation, the thermostat must be allowed to stabilize at room temperature for a minimum of 30 minutes for proper operation).
10. Set the temperature adjustment to the desired setting.

This thermostat has been electronically calibrated at the factory. No adjustment or leveling is necessary.

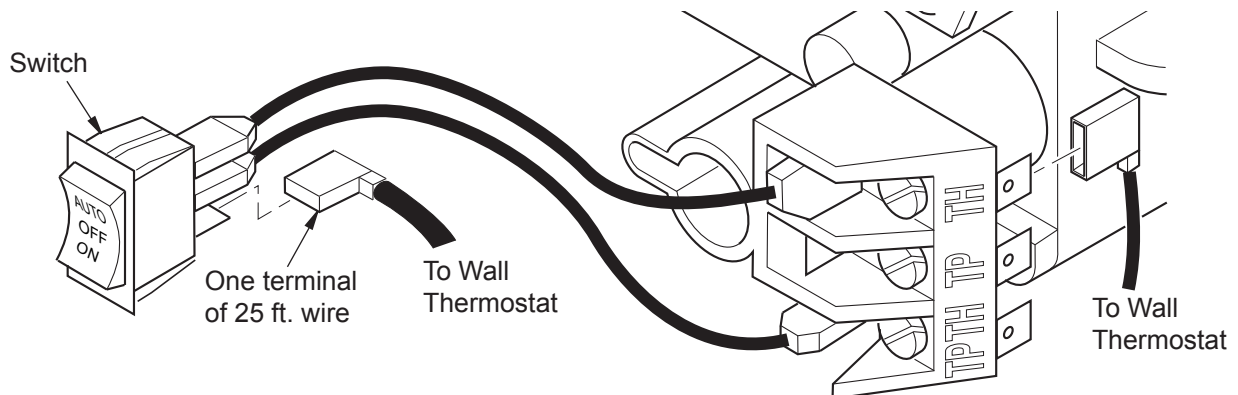


Figure 1 - Connecting Wire Terminals

DESA
HEATING PRODUCTS
2701 Industrial Drive
P.O. Box 90004
Bowling Green, KY 42102-9004

104185-01
Rev. C
01/07